

From: Patrick Barney  
1720 N. Main St.  
Russell, KS 67665

Kansas Corporation Commission  
/s/ Lynn M. Retz

Kansas Corporation Commission  
Conservation Division  
8 March 2020

Tel: (785) 483-2456  
Em: patrickbarney@gmail.com

Re: G L M Oil Company =  
PO Box 193  
Russell, KS 67665

Application to the KCC, Conservation Div. for a permit  
to dispose of produced saltwater into the Steinle # 5.

I am issuing a letter to protest and dispute the application (dated February 24, 2020) submitted for disposal of waste saltwater into Steinle #5 Well / 15-167-22899-00-01.

I do not want waste water (brine or otherwise, of any type) to be disposed of into the Steinle #5 well.

I'm a resident, living with 0.5 mile of the proposed wastewater well to be used - with an old oil well situated on my property.

The depth of the proposed injection wastewater well is 3270 feet.

The depth of the plugged-abandoned (in 1957) well on my property is 3287 feet.

The two wells are marked about 2200 feet apart. (KS Geo. Survey Map = online).

Two articles have been included with this letter, underlining passages that indicate concerns, hazards, and potential negative impacts which may occur involving this area, given the use of Steinle #5 Well with waste water.

THERE ARE CONCERNS I HAVE REGARDING THIS PROPOSED WELL BEING UTILIZED FOR SALT WATER DISPOSAL AT THIS TIME.

- The impact on the environment in the area where I reside and live. I do not want the area affected adversely with environmental degradation with the soil, substrata, or potential seepage flow above ground (see on both Articles).

- Underground impact on destabilizing strata, creating shifting, resulting with earthquakes. Oklahoma has had a marked increase in earthquakes, most likely as a result of oil industry activity (see "naked capitalism" Article).

- Underground impact on destabilizing strata, creating cavities, resulting in a sinkhole or subsidence. Ground shift can be caused by underground pressure, changes in hydrodynamics, and dissolution of solids in strata. Subtle shifts can cause underground play to damage structures, such as basement foundations. More impactful shifting can buckle foundations,

driveways, and place significant stress on multistory structures.

I have a two-story house built in the 1920s.

- Affected ground strata with increased seepage via groundwater or other outflows. Already there is significant surface flow of water - apparently throughout the year in northwest Russell, close to my residence. What the cause of this flow is and the contents of the water composition I have in question. Is this simply high stratum groundwater, or is this flow possibly affiliated with well seepage from waste water wells - I do not want seepage of brine wastewater to increase this flow or add to it, namely on or near my property - as this can affect property saleability/value.

- Direct impact on my own property - through either the ground, land, and flora; or on the structures themselves. An oil well is on my property. The flow of waste water can migrate via this channel and rise to ground level or flow horizontally (or both) to travel along permeable ground strata, even pipe/conduit lines. This in turn can affect ground soil, vegetation, basements, other structures, and the health of animals and humans. I have fruit trees in my yard. And garden areas. These could all be adversely affected by intrusive migration of brine wastewater, which may also carry toxic, radioactive, and carcinogenic material.

- Any of these events can affect the valuation of my property and ability to sell/relocate once an incident is made known. I have lived in this house for many many years and have an investment of not only money but memories and lifestyle with it. I raised my three children here and I have an interest for the moment to remain here. But I do not want to have the worry and feelings of instability that my home and land can be devastated and destroyed by migrating water tainted with solubles that can damage any or all the flora, groundsoil, and structures where I live.

I have an interest to have a good investment - both in my life here and in a financially stable domicile. I ask that these are not destroyed.



My name is Patrick Barney. I teach at RHS - the subjects U.S. Government, German, and Anthropology. I also have a M.S. in Urban Studies, emphasis Environmental Assessment. I used to work for an Engineering-environmental firm, *Engineering Science*, at an office location that dealt in Federal Superfund sites, remediation, monitoring, and removal of soil and material with hazardous waste. I myself have been trained in Hazardous Waste. I also worked as a Transportation Planner in New Jersey. My Master's Project involved case studies with Underground Storage Tank Leakage in Cuyahoga County, Ohio.

Please let me know regarding what is to happen.

Thank you,

Patrick Barney

INJECTION WELL - STEINLE 5 at bottom &  
MY WELL - Location at top. distance appears about 2200' with the two.

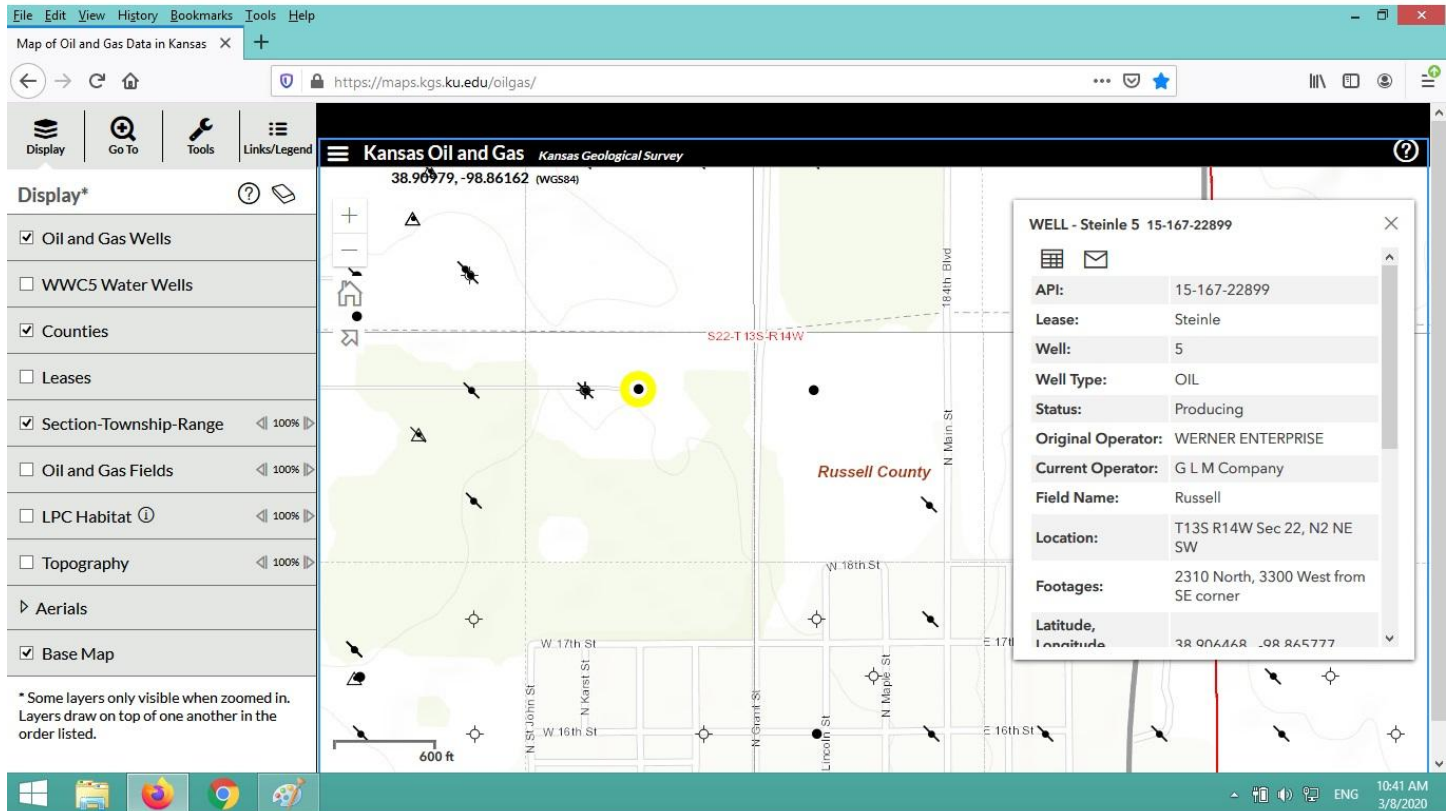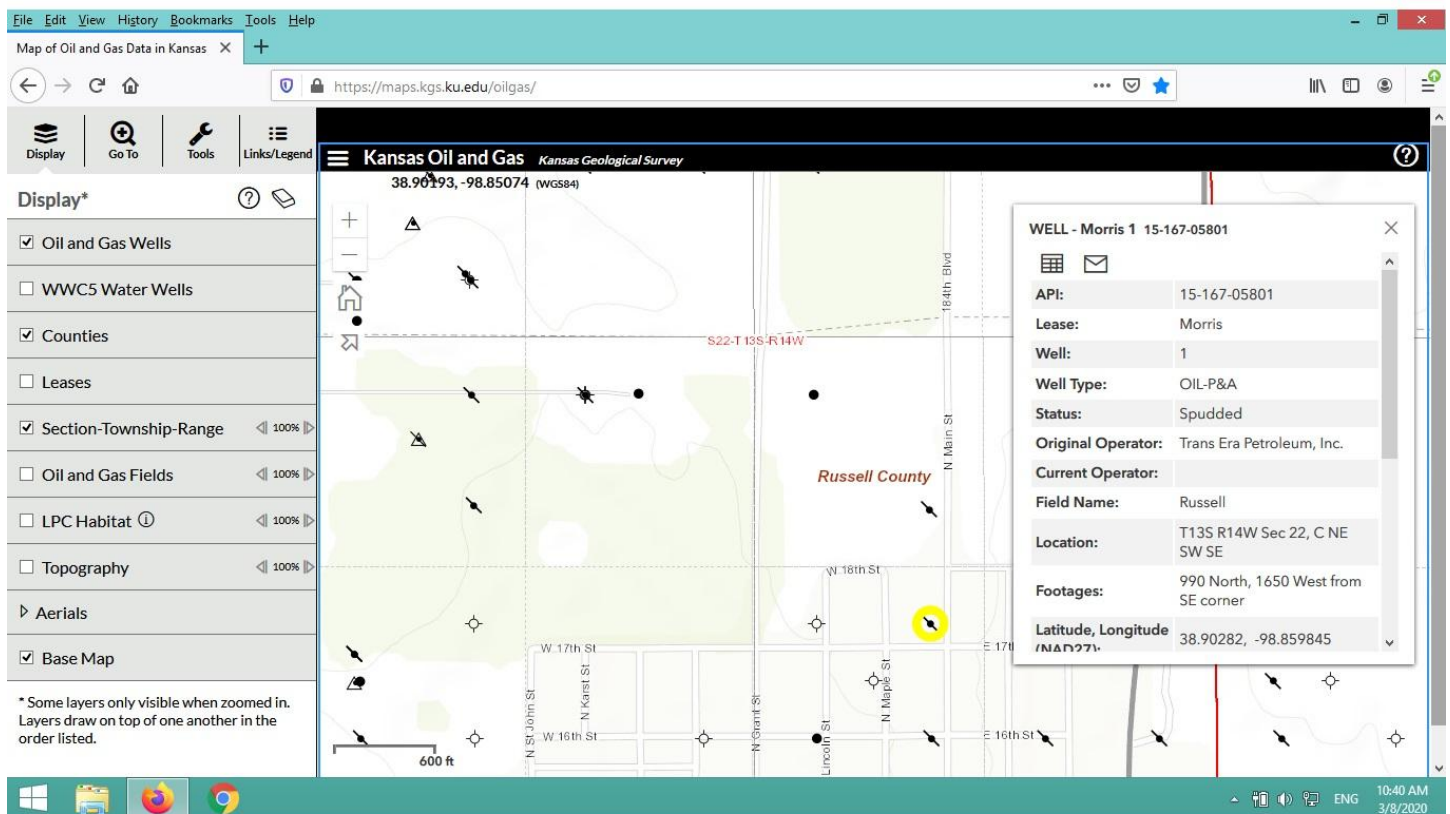

# Injection Wells: The Poison Beneath Us

Lax oversight, uncertain science plague program under which industries dump trillions of gallons of waste underground

by Abrahm Lustgarten

June 21, 2012, 8:20 a.m. EDT

## Section Underlines / Highlights added by Patrick

Over the past several decades, U.S. industries have injected [more than 30 trillion gallons of toxic liquid deep into the earth](#), using broad expanses of the nation's geology as an invisible dumping ground.

No company would be allowed to pour such dangerous chemicals into the rivers or onto the soil. But until recently, scientists and environmental officials have assumed that deep layers of rock beneath the earth would safely entomb the waste for millennia.

There are growing signs they were mistaken.

Records from disparate corners of the United States show that [wells drilled to bury this waste deep beneath the ground have repeatedly leaked, sending dangerous chemicals and waste gurgling to the surface](#) or, on occasion, seeping into shallow aquifers that store a significant portion of the nation's drinking water.

In 2010, contaminants from such a well bubbled up in a west Los Angeles dog park. Within the past three years, similar fountains of oil and gas drilling waste have appeared in Oklahoma and Louisiana. In South Florida, 20 of the nation's most stringently regulated disposal wells failed in the early 1990s, releasing partly treated sewage into aquifers that may one day be needed to supply Miami's drinking water.

There are more than 680,000 underground waste and injection wells nationwide, more than 150,000 of which shoot industrial fluids thousands of feet below the surface. Scientists and federal [regulators acknowledge they do not know how many of the sites are leaking](#).

Federal officials and many geologists insist that the risks posed by all this dumping are minimal. Accidents are uncommon, they say, and groundwater reserves — from which most Americans get their drinking water — remain safe and far exceed any plausible threat posed by injecting toxic chemicals into the ground.

But in interviews, several key experts acknowledged that the idea that injection is safe rests on science that has not kept pace with reality, and on oversight that doesn't always work.

"In 10 to 100 years we are going to find out that most of our groundwater is polluted," said Mario Salazar, an engineer who worked for 25 years as a technical expert with the EPA's underground injection program in Washington. "A lot of people are going to get sick, and a lot of people may die."

The boom in oil and natural gas drilling is deepening the uncertainties, geologists acknowledge. [Drilling produces copious amounts of waste, burdening regulators](#) and demanding hundreds of additional disposal wells. Those wells — more holes punched in the ground — are changing the earth's geology, adding man-made fractures that allow water and waste to flow more freely.

"There is no certainty at all in any of this, and whoever tells you the opposite is not telling you the truth," said Stefan Finsterle, a leading hydrogeologist at Lawrence Berkeley National Laboratory who specializes in understanding the properties of rock layers and modeling how fluid flows through them. "You have changed the system with pressure and temperature and fracturing, so you don't know how it will behave."

[A ProPublica review of well records, case histories and government summaries of more than 220,000 well inspections found that structural failures inside injection wells are routine. From late 2007 to late 2010, one well integrity violation was issued for every six deep injection wells examined — more than 17,000 violations nationally. More than 7,000 wells showed signs that their walls were leaking. Records also show wells are frequently operated in violation of safety regulations and under conditions that greatly increase the risk of](#)

fluid leakage and the threat of water contamination.

Structurally, a disposal well is the same as an oil or gas well. Tubes of concrete and steel extend anywhere from a few hundred feet to two miles into the earth. At the bottom, the well opens into a natural rock formation. There is no container. Waste simply seeps out, filling tiny spaces left between the grains in the rock like the gaps between stacked marbles.

Many scientists and regulators say the alternatives to the injection process — burning waste, treating wastewater, recycling, or disposing of waste on the surface — are far more expensive or bring additional environmental risks.

Subterranean waste disposal, they point out, is a cornerstone of the nation's economy, relied on by the pharmaceutical, agricultural and chemical industries. It's also critical to a future less dependent on foreign oil: Hydraulic fracturing, "clean coal" technologies, nuclear fuel production and carbon storage (the keystone of the strategy to address climate change) all count on pushing waste into rock formations below the earth's surface.

The U.S. Environmental Protection Agency, which has primary regulatory authority over the nation's injection wells, would not discuss specific well failures identified by ProPublica or make staffers available for interviews. The agency also declined to answer many questions in writing, though it sent responses to several. Its director for the Drinking Water Protection Division, Ann Codrington, sent a statement to ProPublica defending the injection program's effectiveness.

"Underground injection has been and continues to be a viable technique for subsurface storage and disposal of fluids when properly done," the statement said. "EPA recognizes that more can be done to enhance drinking water safeguards and, along with states and tribes, will work to improve the efficiency of the underground injection control program."

Still, some experts see the well failures and leaks discovered so far as signs of broader problems, raising concerns about how much pollution may be leaking out undetected. By the time the damage is discovered, they say, it could be irreversible.

"Are we heading down a path we might regret in the future?" said Anthony Ingraffea, a Cornell University engineering professor who has been an outspoken critic of claims that wells don't leak. "Yes."

\*\*\*

In September 2003, Ed Cowley got a call to check out a pool of briny water in a bucolic farm field outside Chico, Texas. Nearby, he said, a stand of trees had begun to wither, their leaves turning crispy brown and falling to the ground.

Chico, a town of about 1,000 people 50 miles northwest of Fort Worth, lies in the heart of Texas' Barnett Shale. Gas wells dot the landscape like mailboxes in suburbia. A short distance away from the murky pond, an oil services company had begun pumping millions of gallons of drilling waste into an injection well.

Regulators refer to such waste as salt water or brine, but it often includes less benign contaminants, including fracking chemicals, benzene and other substances known to cause cancer.

The well had been authorized by the Railroad Commission of Texas, which once regulated railways but now oversees 260,000 oil and gas wells and 52,000 injection wells. (Another agency, the Texas Commission on Environmental Quality, regulates injection wells for waste from other industries.)

Before issuing the permit, commission officials studied mathematical models showing that waste could be safely injected into a sandstone layer about one-third of a mile beneath the farm. They specified how much waste could go into the well, under how much pressure, and calculated how far it would dissipate underground. As federal law requires, they also reviewed a quarter-mile radius around the site to make sure waste would not seep back toward the surface through abandoned wells or other holes in the area.

Yet the precautions failed. "Salt water" brine migrated from the injection site and shot back to the surface through three old well holes nearby.

"Have you ever seen an artesian well?" recalled Cowley, Chico's director of public works. "It was just water flowing up out of the ground."

Despite residents' fears that the injected waste could be making its way toward their drinking water,

commission officials did not sample soil or water near the leak.

If the injection well waste "had threatened harm to the ground water in the area, an in-depth RRC investigation would have been initiated," Ramona Nye, a spokeswoman for Texas' Railroad Commission, wrote in an email.

The agency disputes Cowley's description of a pool of brine or of dead trees, saying that the waste barely spilled beyond the overflowing wells, though officials could not identify any documents or staffers who contradicted Cowley's recollections. Accounts similar to Cowley's appeared in an article about the leak in the Wise County Messenger, a local newspaper. The agency has destroyed its records about the incident, saying it is required to keep them for only two years.

After the breach, the commission ordered two of the old wells to be plugged with cement and restricted the rate at which waste could be injected into the well. It did not issue any violations against the disposal company, which had followed Texas' rules, regulators said. The commission allowed the well operator to continue injecting thousands of barrels of brine into the well each day. A few months later, brine began spurting out of three more old wells nearby.

"It's kind of like Whac-a-Mole, where one thing pops up and by the time you go to hit it, another thing comes up," Cowley said. "It was frustrating. ... If your water goes, what does that do to the value of your land?"

Deep well injection takes place in 32 states, from Pennsylvania to Michigan to California. Most wells are around the Great Lakes and in areas where oil and gas is produced: along the Appalachian crest and the Gulf Coast, in California and in Texas, which has more wells for hazardous industrial waste and oil and gas waste than any other state.

Federal rules divide wells into six classes based on the material they hold and the industry that produced it. Class 1 wells handle the most hazardous materials, including fertilizers, acids and deadly compounds such as asbestos, PCBs and cyanide. The energy industry has its own category, Class 2, which includes disposal wells and wells in which fluids are injected to force out trapped oil and gas. The most common wells, called Class 5, are a sort of catch-all for everything left over from the other categories, including storm-water runoff from gas stations.

The EPA requires that Class 1 and 2 injection wells be drilled the deepest to assure that the most toxic waste is pushed far below drinking water aquifers. Both types of wells are supposed to be walled with multiple layers of steel tubing and cement and regularly monitored for cracks.

Officials' confidence in this manner of disposal stems not only from safety precautions, but from an understanding of how rock formations trap fluid.

Underground waste, officials say, is contained by layer after layer of impermeable rock. If one layer leaks, the next blocks the waste from spreading before it reaches groundwater. The laws of physics and fluid dynamics should ensure that the waste can't spread far and is diluted as it goes.

The layering "is a very strong phenomenon and it's on our side," said Susan Hovorka, a senior research scientist at the University of Texas at Austin's Bureau of Economic Geology.

According to risk analyses cited in EPA documents, a significant well leak that leads to water contamination is highly unlikely — on the order of one in a million.

Once waste is underground, though, there are few ways to track how far it goes, how quickly or where it winds up. There is plenty of theory, but little data to prove the system works.

"I do think the risks are low, but it has never been adequately demonstrated," said John Apps, a leading geoscientist who advises the Department of Energy for Lawrence Berkeley National Labs. "Every statement is based on a collection of experts that offer you their opinions. Then you do a scientific analysis of their opinions and get some probability out of it. This is a wonderful way to go when you don't have any evidence one way or another... But it really doesn't mean anything scientifically."

The hard data that does exist comes from well inspections conducted by federal and state regulators, who can issue citations to operators for injecting illegally, for not maintaining wells, or for operating wells at unsafe pressures. This information is the EPA's primary means of tracking the system's health on a national scale. Yet, in response to questions from ProPublica, the EPA acknowledged it has done very little with the data it

collects. The agency could not provide ProPublica with a tally of how frequently wells fail or of how often disposal regulations are violated. It has not counted the number of cases of waste migration or contamination in more than 20 years. The agency often accepts reports from state injection regulators that are partly blank, contain conflicting figures or are missing key details, ProPublica found.

In 2007, the EPA launched a national data system to centralize reports on injection wells. As of September 2011 — the last time the EPA issued a public update — less than half of the state and local regulatory agencies overseeing injection were contributing to the database. It contained complete information from only a handful of states, accounting for a small fraction of the deep wells in the country.

The EPA did not respond to questions seeking more detail about how it handles its data, or about how the agency judges whether its oversight is working.

In a 2008 interview with ProPublica, one EPA scientist acknowledged shortcomings in the way the agency oversees the injection program.

"It's assumed that the monitoring rules and requirements are in place and are protective — that's assumed," said Gregory Oberley, an EPA groundwater specialist who studies injection and water issues in the Rocky Mountain region. "You're not going to know what's going on until someone's well is contaminated and they are complaining about it."

\*\*\*

ProPublica's analysis of case histories and EPA data from October 2007 to October 2010 showed that when an injection well fails, it is most often because of holes or cracks in the well structure itself.

Operators are required to do so-called "mechanical integrity" tests at regular intervals, yearly for Class 1 wells and at least once every five years for Class 2 wells. In 2010, the tests led to more than 7,500 violations nationally, with more than 2,300 wells failing. In Texas, one violation was issued for every three Class 2 wells examined in 2010.

Such breakdowns can have serious consequences. Damage to the cement or steel casing can allow fluids to seep into the earth, where they could migrate into water supplies.

Regulators say redundant layers of protection usually prevent waste from getting that far, but EPA data shows that in the three years analyzed by ProPublica, more than 7,500 well test failures involved what federal water protection regulations describe as "fluid migration" and "significant leaks."

In September 2009, workers for Unit Petroleum Company discovered oil and gas waste in a roadside ditch in southern Louisiana. After tracing the fluid to a crack in the casing of a nearby injection well, operators tested the rest of the well. Only then did they find another hole — 600 feet down, and just a few hundred feet away from an aquifer that is a source of drinking water for that part of the state.

Most well failures are patched within six months of being discovered, EPA data shows, but with as much as five years passing between integrity tests, it can take a while for leaks to be discovered. And not every well can be repaired. Kansas shut down at least 47 injection wells in 2010, filling them with cement and burying them, because their mechanical integrity could not be restored. Louisiana shut down 82. Wyoming shut down 144. Another way wells can leak is if waste is injected with such force that it accidentally shatters the rock meant to contain it. A report published by scientists at the Department of Energy's Pacific Northwest National Laboratory and the University of Texas said that high pressure is "the driving force" that can help connect deep geologic layers with shallower ones, allowing fluid to seep through the earth.

Most injection well permits strictly limit the maximum pressure allowed, but well operators — rushing to dispose of more waste in less time — sometimes break the rules, state regulatory inspections show. According to data provided by states to the EPA, deep well operators have been caught exceeding injection pressure limits more than 1,100 times since 2008.

Excessive pressure factored into a 1989 well failure that yielded new clues about the risks of injection.

While drilling a disposal well in southern Ohio, workers for the Aristech Chemical Corp. (since bought by Sunoco, and sold again, in 2011, to Haverhill Chemicals) were overwhelmed by the smell of phenol, a deadly chemical the company had injected into two Class 1 wells nearby. Somehow, perhaps over decades, the pollution had risen 1,400 feet through solid rock and was progressing toward surface aquifers.

Ohio environmental officials — aided by the EPA — investigated for some 15 years. They concluded that the wells were mechanically sound, but Aristech had injected waste into them faster and under higher pressure than the geologic formation could bear.

Though scientists maintain that the Aristech leak was a rarity, they acknowledge that such problems are more likely in places where industrial activity has changed the underground environment.

There are upwards of 2 million abandoned and plugged oil and gas wells in the U.S., more than 100,000 of which may not appear in regulators' records. Sometimes they are just broken off tubes of steel, buried or sticking out of the ground. Many are supposed to be sealed shut with cement, but studies show that cement breaks down over time, allowing seepage up the well structure.

Also, if injected waste reaches the bottom of old wells, it can quickly be driven back toward aquifers, as it was in Chico.

"The United States looks like a pin cushion," said Bruce Kobelski, a geologist who has been with the agency's underground injection program since 1986. Kobelski spoke to ProPublica in May, 2011, before the EPA declined additional interview requests for this story. "Unfortunately there are cases where someone missed a well or a well wasn't indicated. It could have been a well from the turn of the [20th] century."

Clefts left after the earth is cracked open to frack for oil and gas also can connect abandoned wells and waste injection zones. How far these man-made fissures go is still the subject of research and debate, but in some cases they have reached as much as a half-mile, even intersecting fractures from neighboring wells.

When injection wells intersect with fracked wells and abandoned wells, the combined effect is that many of the natural protections assumed to be provided by deep underground geology no longer exist.

"It's a natural system and if you go in and start punching holes through it and changing pressure systems around, it's no longer natural," said Nathan Wiser, an underground injection expert working for the EPA in its Rocky Mountain region, in a 2010 interview. "It's difficult to know how it would behave in those circumstances."

EPA data provides a window into some injection well problems, but not all. There is no way to know how many wells have undetected leaks or to measure the amount of waste escaping from them.

In at least some cases, records obtained by ProPublica show, well failures may have contaminated sources of drinking water. Between 2008 and 2011, state regulators reported 150 instances of what the EPA calls "cases of alleged contamination," in which waste from injection wells purportedly reached aquifers. In 25 instances, the waste came from Class 2 wells. The EPA did not respond to requests for the results of investigations into those incidents or to clarify the standard for reporting a case.

The data probably understates the true extent of such incidents, however.

Leaking wells can simply go undetected. One Texas study looking for the cause of high salinity in soil found that at least 29 brine injection wells in its study area were likely sending a plume of salt water up into the ground unnoticed. Even when a problem is reported, as in Chico, regulators don't always do the expensive and time-consuming work necessary to investigate its cause.

"The absence of episodes of pollution can mean that there are none, or that no one is looking," said Salazar, the EPA's former injection expert. "I would tend to believe it is the latter."

\*\*\*

The practice of injecting waste underground arose as a solution to an environmental crisis.

In the first half of the 20th century, toxic waste collected in cesspools, or was dumped in rivers or poured onto fields. As the consequences of unbridled pollution became unacceptable, the country turned to an out-of-sight alternative. Drawing on techniques developed by the oil and gas industry, companies started pumping waste back into wells drilled for resources. Toxic waste became all but invisible. Air and water began to get cleaner. Then a host of unanticipated problems began to arise.

In April, 1967 pesticide waste injected by a chemical plant at Denver's Rocky Mountain Arsenal destabilized a seismic fault, causing a magnitude 5.0 earthquake — strong enough to shatter windows and close schools — and jolting scientists with newfound risks of injection, according to the U.S. Geological Survey.

A year later, a corroded hazardous waste well for pulping liquor at the Hammermill Paper Co., in Erie, Pa.,

ruptured. Five miles away, according to an EPA report, "a noxious black liquid seeped from an abandoned gas well" in Presque Isle State Park.

In 1975 in Beaumont, Texas, dioxin and a highly acidic herbicide injected underground by the Velsicol Chemical Corp. burned a hole through its well casing, sending as much as five million gallons of the waste into a nearby drinking water aquifer.

Then in August 1984 in Oak Ridge, Tenn., radioactive waste was turned up by water monitoring near a deep injection well at a government nuclear facility.

Regulators raced to catch up. In 1974, the Safe Drinking Water Act was passed, establishing a framework for regulating injection. Then, in 1980, the EPA set up the tiered classes of wells and began to establish basic construction standards and inspection schedules. The EPA licensed some state agencies to monitor wells within their borders and handled oversight jointly with others, but all had to meet the baseline requirements of the federal Underground Injection Control program.

Even with stricter regulations in place, 17 states — including Alabama, North Carolina, South Carolina and Wisconsin — banned Class 1 hazardous deep well injection.

"We just felt like based on the knowledge that we had at that time that it was not something that was really in the best interest of the environment or the state," said James Warr, who headed Alabama's Department of Environmental Management at the time.

Injection accidents kept cropping up.

A 1987 General Accountability Office review put the total number of cases in which waste had migrated from Class 1 hazardous waste wells into underground aquifers at 10 — including the Texas and Pennsylvania sites. Two of those aquifers were considered potential drinking water sources.

In 1989, the GAO reported 23 more cases in seven states where oil and gas injection wells had failed and polluted aquifers. New regulations had done little to prevent the problems, the report said, largely because most of the wells involved had been grandfathered in and had not had to comply with key aspects of the rules. Noting four more suspected cases, the report also suggested there could be more well failures, and more widespread pollution, beyond the cases identified. "The full extent to which injected brines have contaminated underground sources of drinking water is unknown," it stated.

The GAO concluded that most of the contaminated aquifers could not be reclaimed because fixing the damage was "too costly" or "technically infeasible."

Faced with such findings, the federal government drafted more rules aimed at strengthening the injection program. The government outlawed certain types of wells above or near drinking water aquifers, mandating that most industrial waste be injected deeper.

The agency also began to hold companies that disposed of hazardous industrial waste to far stiffer standards. To get permits to dispose of hazardous waste after 1988, companies had to prove — using complex models and geological studies — that the stuff they injected wouldn't migrate anywhere near water supplies for 10,000 years. They were already required to test for fault zones and to conduct reviews to ensure there were no conduits for leakage, such as abandoned wells, within a quarter-mile radius. Later, that became a two-mile minimum radius for some wells.

The added regulations would have prevented the vast majority of the accidents that occurred before the late 1980s, EPA officials contend.

"The requirements weren't as rigorous, the testing wasn't as rigorous and in some cases the shallow aquifers were contaminated," Kobelski said. "The program is not the same as it was when we first started."

Today's injection program, however, faces a new set of problems.

As federal regulators toughened rules for injecting hazardous waste, oil and gas companies argued that the new standards could drive them out of business. State oil and gas regulators pushed back against the regulations, too, saying that enforcing the rules for Class 2 wells — which handle the vast majority of injected waste by volume — would be expensive and difficult.

Ultimately, the energy industry won a critical change in the federal government's legal definition of waste: Since 1988, all material resulting from the oil and gas drilling process is considered non-hazardous, regardless

of its content or toxicity.

"It took a lot of talking to sell the EPA on that and there are still a lot of people that don't like it," said Bill Bryson, a geologist and former head of the Kansas Corporation Commission's Conservation Division, who lobbied for and helped draft the federal rules. "But it seemed the best way to protect the environment and to stop everybody from just having to test everything all the time."

The new approach removed many of the constraints on the oil and gas industry. They were no longer required to conduct seismic tests (a stricture that remained in place for Class 1 wells). Operators were allowed to test their wells less frequently for mechanical integrity and the area they had to check for abandoned wells was kept to a minimum — one reason drilling waste kept bubbling to the surface near Chico.

Soon after the first Chico incident, Texas expanded the area regulators were required to check for abandoned waste wells (a rule that applied only to certain parts of the state). Doubling the radius they reviewed in Chico to a half mile, they found 13 other injection or oil and gas wells. When they studied the land within a mile — the radius required for review of many Class 1 wells — officials discovered another 35 wells, many dating to the 1950s.

The Railroad Commission concluded that the Chico injection well had overflowed: The target rock zone could no longer handle the volume being pushed into it. Trying to cram in more waste at the same speed could cause further leaks, regulators feared. The commission set new limits on how fast the waste could be injected, but did not forbid further disposal. The well remains in use to this day.

In late 2008, samples of Chico's municipal drinking water were found to contain radium, a radioactive derivative of uranium and a common attribute of drilling waste. The water well was a few miles away from the leaking injection well site, but environmental officials said the contaminants discovered in the water well were unrelated, mostly because they didn't include the level of sodium typical of brine.

Since then, Ed Cowley, the public works director, said commission officials have continued to assure him that brine won't reach Chico's drinking water. But since the agency keeps allowing more injection and doesn't track the cumulative volume of waste going into wells in the area, he's skeptical that they can keep their promise. "I was kind of like, 'You all need to get together and look at the total amount you are trying to fit through the eye of the needle,'" he said.

\*\*\*

When sewage flowed from 20 Class 1 wells near Miami into the Upper Floridan aquifer, it challenged some of scientists' fundamental assumptions about the injection system.

The wells — which had helped fuel the growth of South Florida by eliminating the need for expensive water treatment plants — had passed rigorous EPA and state evaluation throughout the 1980s and 1990s.

Inspections showed they were structurally sound. As Class 1 wells, they were subject to some of the most frequent tests and closest scrutiny.

Yet they failed.

The wells' designers would have calculated what is typically called the "zone of influence" — the space that waste injected into the wells was expected to fill. This was based on estimates of how much fluid would be injected and under what pressure.

In drawings, the zone of influence typically looks like a Hershey's kiss, an evenly dispersed plume spreading in a predictable circular fashion away from the bottom of the well. Above the zone, most drawings depict uniform formations of rock not unlike a layer cake.

Based on modeling and analysis by some of the most sophisticated engineering consultants in the country, Florida officials, with the EPA's assent, concluded that waste injected into the Miami-area wells would be forever trapped far below the South Florida peninsula.

"All of the modeling indicated that the injectate would be confined in the injection zone," an EPA spokesperson wrote to ProPublica in a statement.

But as Miami poured nearly half a billion gallons of partly treated sewage into the ground each day from the late 1980s through the mid 1990s, hydrogeologists learned that the earth — and the flow of fluids through it — wasn't as uniform as the models depicted. Florida's injection wells, for example, had been drilled into rock

that was far more porous and fractured than scientists previously understood.

"Geology is never what you think it is," said Ronald Reese, a geologist with the United States Geological Survey in Florida who has studied the well failures there. "There are always surprises."

Other gaps have emerged between theories of how underground injection should work and how it actually does. Rock layers aren't always neatly stacked as they appear in engineers' sketches. They often fold and twist over on themselves. Waste injected into such formations is more likely to spread in lopsided, unpredictable ways than in a uniform cone. It is also likely to channel through spaces in the rock as pressure forces it along the weakest lines.

Petroleum engineers in Texas have found that when they pump fluid into one end of an oil reservoir to push oil out the other, the injected fluid sometimes flows around the reservoir, completely missing the targeted zone.

"People are still surprised at the route that the injectate is taking or the bypassing that can happen," said Jean-Philippe Nicot, a research scientist at the University of Texas' Bureau of Economic Geology.

Conventional wisdom says fluids injected underground should spread at a rate of several inches or less each year, and go only as far as they are pushed by the pressure inside the well. In some instances, however, fluids have traveled faster and farther than researchers thought possible.

In a 2000 case that wasn't caused by injection but brought important lessons about how fluids could move underground, hydrogeologists concluded that bacteria-polluted water migrated horizontally underground for several thousand feet in just 26 hours, contaminating a drinking water well in Walkerton, Ontario, and sickening thousands of residents. The fluids traveled 80 times as fast as the standard software model predicted was possible.

According to the model, vertical movement of underground fluids shouldn't be possible at all, or should happen over what scientists call "geologic time": thousands of years or longer. Yet a 2011 study in Wisconsin found that human viruses had managed to infiltrate deep aquifers, probably moving downward through layers believed to be a permanent seal.

According to a study published in April in the journal *Ground Water*, it's not a matter of if fluid will move through rock layers, but when.

Tom Myers, a hydrologist, drew on research showing that natural faults and fractures are more prevalent than commonly understood to create a model that predicts how chemicals might move in the Marcellus Shale, a dense layer of rock that has been called impermeable. The Marcellus Shale, which stretches from New York to Tennessee, is the focus of intense debate because of concerns that chemicals injected in drilling for natural gas will pollute water.

Myers' new model said that chemicals could leak through natural cracks into aquifers tapped for drinking water in about 100 years, far more quickly than had been thought. In areas where there is hydraulic fracturing or drilling, Myers' model shows, man-made faults and natural ones could intersect and chemicals could migrate to the surface in as little as "a few years, or less."

"It's out of sight, out of mind now. But 50 years from now?" Myers said, referring to injected waste and the rock layers trusted to entrap it. "Simply put, they are not impermeable."

Myers' work is among the few studies done over the past few decades to compare theories of hydrogeology to what actually happens. But even his research is based on models.

"A lot of the concepts and a lot of the regulations that govern this whole practice of subsurface injection is kind of dated at this point," said one senior EPA hydrologist who was not authorized to speak to ProPublica, and declined to be quoted by name.

"It's a problem," he said. "There needs to be a hard look at this in a new way."

From: **naked capitalism**

<https://www.nakedcapitalism.com/2018/11/fracking-industrys-wastewater-injection-well-problem.html>

# The Fracking Industry's Wastewater Injection Well Problem

Posted on November 20, 2018 by Jerri-Lynn Scofield    Underlines = Patrick Barney

Jerri-Lynn here. This latest DeSmogBlog fracking post discusses the damage fracking is causing, by triggering earthquakes and contaminating water supplies.

For those who may have missed it, I also suggest you read this important September post, The Fracking Industry's Water Nightmare: Injection Wells Damage Production Wells, Rising Disposal Costs Will Increase Industry Losses. It's not necessary to read the earlier post if you only have time for the latest.

By Justin Mikulka, a freelance writer, audio and video producer living in Trumansburg, NY.  
Originally published at DeSmog Blog



The first known oil well in Oklahoma happened by accident. It was 1859 and Lewis Ross was actually drilling for saltwater (brine), not oil. Brine was highly valued at the time for the salt that could be used to preserve meat. As Ross drilled deeper for brine, he hit oil. And people have been drilling for oil in Oklahoma ever since.

Lewis Ross might find today's drilling landscape in the Sooner State somewhat ironic. The oil

and gas industry, which has surging production due to horizontal drilling and fracking, is pumping out huge volumes of oil but even more brine. So much brine, in fact, that the fracking industry needs a way to dispose of the brine, or “produced water,” that comes out of oil and gas wells because it isn’t suitable for curing meats. In addition to salts, these wastewaters can contain naturally occurring radioactive elements and heavy metals.

But the industry’s preferred approaches for disposing of fracking wastewater — pumping it underground in either deep or shallow injection wells for long-term storage — both come with serious risks for nearby communities.

In Oklahoma, drillers primarily use deep injection wells for storing their wastewater from fracked shale wells, and while the state was producing the same amount of oil in 1985 as in 2015, something else has changed. The rise of the fracking industry in the central U.S. has coincided with a rise in earthquake activity.

From 1975 to 2008, Oklahoma averaged from one to three earthquakes of magnitude 3 or greater a year. But by 2014, the state averaged 1.6 of these earthquakes a day. It now has a website that tracks them in real time.

[FAQ] Oklahoma now has more earthquakes on a regular basis than California. Are they due to fracking? <https://t.co/itV3lvKoLp> #OklahomaStateHoodDay pic.twitter.com/fXM2KCO10P — USGS (@USGS) 16 November 2017

The state has been reluctant to link the two, however.

In 2015 E News reported that the oil industry in Oklahoma, including Harold Hamm, CEO of fracking giant Continental Resources, pressured state scientists to avoid acknowledging the link between earthquakes and drilling waste disposal: “Oklahoma’s state scientists have suspected for years that oil and gas operations in the state were causing a swarm of earthquakes, but in public they rejected such a connection.”

As DeSmog noted in recent election coverage, a top issue in the latest race for a seat on the Oklahoma Corporation Commission, the state agency that regulates oil and gas activity, was earthquakes caused by deep injection wells used to dispose of fracking wastewater.

Incumbent Republican Bob Anthony easily won that election, with financial help from Hamm and others in the oil and gas industry.

#### Wastewater Injection Wells and Earthquakes


Recently published research led by the University of Texas at Austin offers further insight into the link between fracking wastewater injection wells and earthquakes.

Injection wells for fracking wastewater work by pumping these fluids into geologic formations with porous stone that can act as storage areas. Theoretically, the water will stay where it was pumped.

Re-injecting produced water underground is not unique to fracked oil production. However, shale formations where fracking occurs require a different approach to wastewater, and their deep disposal wells in particular are linked to earthquakes.

During conventional oil production, produced water often is pumped back into the oil reservoir in a process known as “enhanced oil recovery.” This produced water replaces oil that has been pumped out of the reservoir, helping maintain pressure under ground and squeeze out even more oil in the future.

Due to the geologic nature of shale formations, drillers can't pump produced water back into them after the shale is fracked and has produced oil and gas. Instead, they transport wastewater to areas where injection wells can be drilled into porous rock and the wastewater can be pumped down. Those injection wells can be either deep or shallow. Unlike with enhanced oil recovery, these wastewater injection wells increase pressure below the surface, and when deep enough (along with other factors), lead to earthquakes.

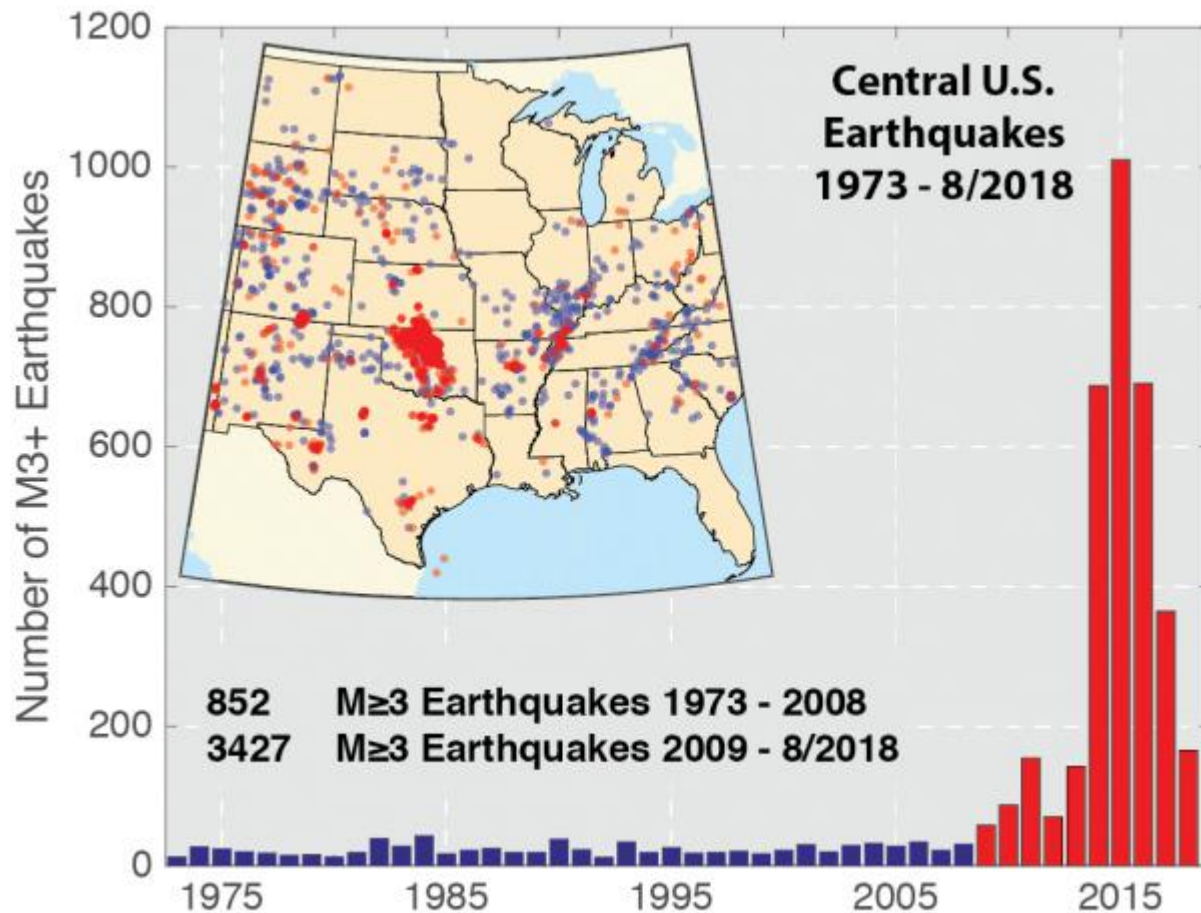

Annual number of earthquakes with a magnitude of 3.0 or larger in the central and eastern United States, 1970–2016. The long-term rate of approximately 25 earthquakes per year increased sharply starting around 2009, which coincides with the surge in the fracking industry. Credit: U.S.Geological Survey

And yet not all fracking areas see the same level of human-caused earthquakes, and in this new paper from the University of Texas, researchers lay out the factors known to increase the likelihood that injection wells cause earthquakes.

In Oklahoma, they conclude those factors are threefold: produced water injection rates, cumulative volumes of produced water, and wells' proximity to a layer of rock known as the "basement."

In other words, this study reports that the likelihood of earthquakes will increase as companies pump wastewater into the ground at higher rates and at greater volumes, both of which increase the pressure of the water underground and the rate at which it is applied.

Proximity to the "basement" refers not to the actual depth of the injection well but how close


it is to a typically deep and old layer of rock called the basement.

This study cited another recent scientific paper which pinned this well proximity to the basement layer as the main factor triggering seismic activity. This is most likely because, as the researchers wrote: “Large faults are expected to be more prevalent at greater depth, particularly in old, brittle basement rocks that have been subjected to different stresses over long times.”

The depth of the basement can vary greatly across the United States, but the deeper an injection well, the more likely it will be close to or penetrate this layer.

Earthquakes are a bigger issue in Oklahoma compared to other large U.S. shale plays, such as the Bakken, Eagle Ford, and Permian Basin, according to the University of Texas study, which says the major difference is that Oklahoma’s wastewater is injected into wells deeper and closer to the basement layer, while other, less-earthquake-prone shale basins have shallower injection wells further from this rock layer.

### C) Oil Production and Wastewater Disposal

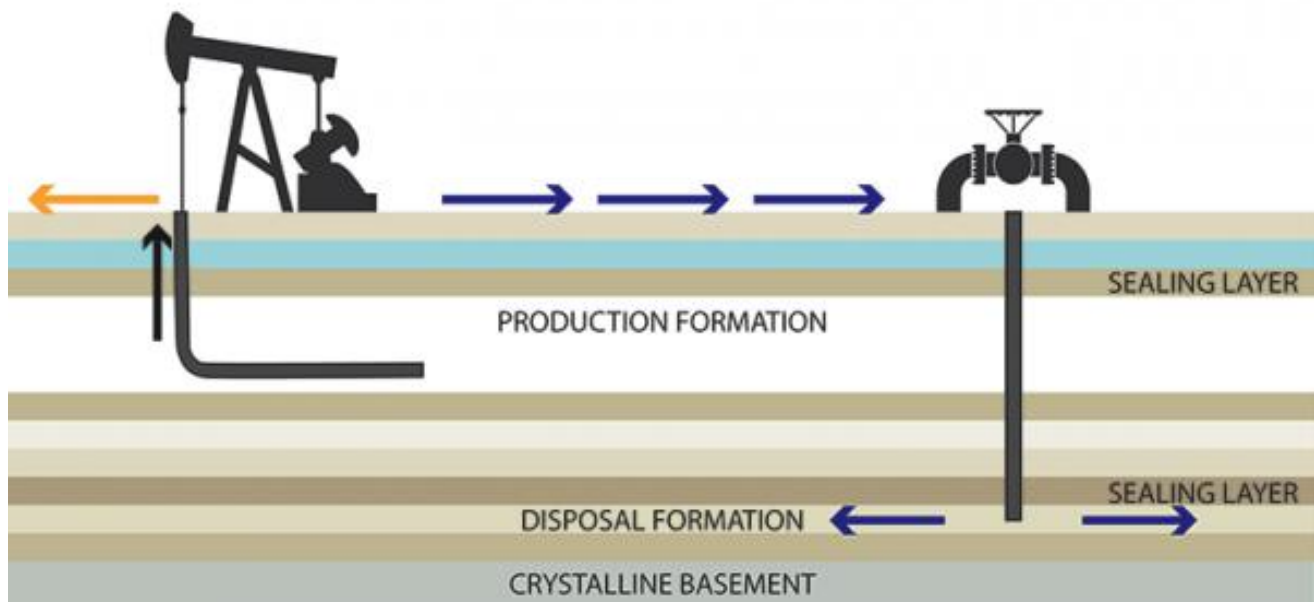

This raises an obvious question: If Oklahoma’s earthquake activity shot up as the state’s oil and gas industry began injecting fracking wastewater into deep wells close to the basement layer, then why not use shallower wells? Especially when considering cost of deep injection wells may be two to three times more than shallower wells, as this paper notes.

The fracking industry should be eager to save money and put to rest questions about earthquakes, right?


Unfortunately, shallow wastewater injection wells come with their own suite of potential problems.

#### Shallow Injection Wells More Likely to Contaminate Aquifers

The closer a company injects fracking wastewater (and all the salts and pollutants that may come with it) to aquifers supplying freshwater for drinking and agriculture, the more likely those aquifers will be contaminated. In the recent University of Texas paper, researchers call

out this increased likelihood in the country's highest producing shale play, the Permian Basin in Texas and New Mexico.

Simply put, high pressure flows to areas of low pressure. Placing a lot of contaminated water under pressure below ground raises the risk of that higher pressure being released "through faults or fractures or through abandoned oil wells that have not been properly plugged." And if those pathways lead to an aquifer a community uses as a freshwater source, then there is a problem.

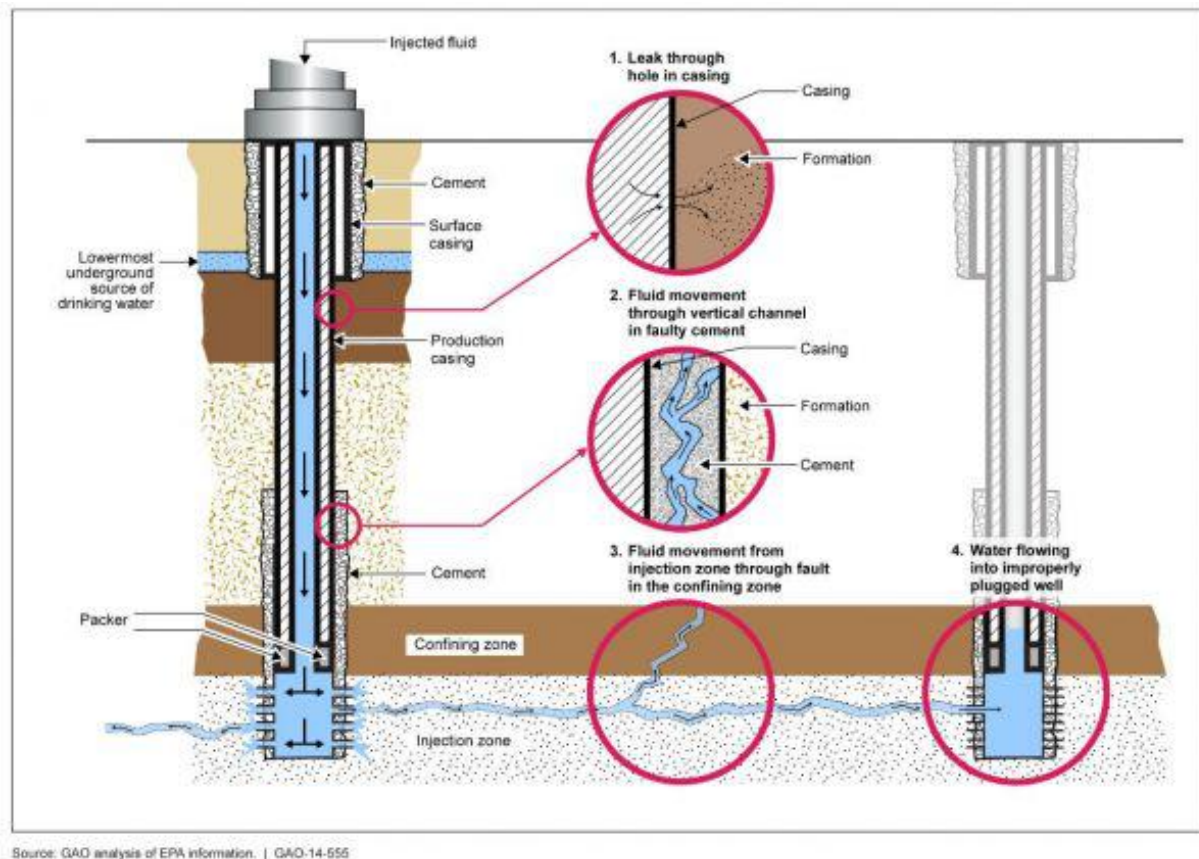

Credit: GAO review of injection wells

"There were over half a million oil wells drilled in the Permian Basin within the past century, with many abandoned or orphaned wells that could provide pathways for overpressured fluids," wrote University of Texas researcher Bridget Scanlon and her colleagues in their recent paper.

How likely are fracking wastewater injection wells to contaminate aquifers? What is the scope of this problem? As with many aspects of the massive fracking experiment occurring across America, the answer remains unclear.

But the volumes of wastewater from the fracking industry are rapidly increasing and the main way to dispose of that water is via injection wells. And to reiterate, injecting produced water under higher pressures beneath the surface is unique to fracking disposal wells and is not characteristic of traditional oil production methods of wastewater disposal.

Oklahoma Already May Have Issues With Shallow Wells

Evidence in Oklahoma suggests some injection wells may be too shallow to avoid usable water

supplies and many drinking water wells are drilled at depths placing them at risk of contamination.

A 2017 report commissioned by the Clean Water Fund found 18 injection wells drilled above the “base of treatable water” (BTW), or the lowest depth at which the state has identified subsurface water that is “in its natural state” and potentially useful for the typical range of human freshwater uses.

In addition to those concerns, the report noted that “6,844 domestic water wells and 175 public water supply wells draw groundwater from below the reported BTW,” which means injection wells could be drilled at similar depths as those drinking water wells.

The Oklahoma Corporation Commission challenged the findings, which were based on its own publicly available data that the agency called “faulty,” and said the 18 injection wells singled out were not injecting into underground sources of drinking water.

While the report did not provide a direct link to any contamination, it suggests the issue of shallow injection wells and drinking water supplies deserves further scrutiny.

The fracking industry is producing record amounts of oil, gas, and wastewater, meaning this problem of wastewater disposal isn’t going away soon and disposal wells are likely to be part of the long-term solution. The Washington Post noted the lack of above-ground options for fracking wastewater disposal in 2015: “Currently there is no way to treat, store, and release the billions of gallons of wastewater at the surface.”

As Scanlon told DeSmog via email, “I think subsurface injection will continue to be an important part of the portfolio [of fracking wastewater disposal].” What remains to be seen is if that subsurface injection of fracking waste ends up mixing with the subsurface fresh water we rely on for survival.

Main image: A flare glows in the background on an Oklahoma unconventional well pad. Credit: Public Herald, CC BY-NC-ND 2.0

This entry was posted in Environment, Global warming, Guest Post, Legal, Politics, Regulations and regulators on November 20, 2018 by Jerri-Lynn Scofield.